

## ORIGINAL RESEARCH ARTICLE

# A review on GA-NN based control strategies for floating solar-ocean hybrid energy platforms

Dinesh Keloth kaithari<sup>1</sup>, Ayyappadas MT<sup>2</sup>, Shalini Goel<sup>3</sup>, Asma Shahin<sup>4</sup>, Shwetal Kishor Patil<sup>5</sup>, Swapnil S. Chaudhari<sup>5</sup>, Aarti Puri<sup>6,8</sup>, Anant Sidhappa Kurhade<sup>7,8\*</sup>

<sup>1</sup> Department of Mechanical and Industrial Engineering, College of Engineering, National University of Science and Technology, Muscat, Oman

<sup>2</sup> Department of Computer Science and Engineering, Amrita Vishwa Vidyapeetham, Amritapuri, Kollam – 690525, Kerala, India.

<sup>3</sup> Department of Information Technology, Raj Kumar Goel Institute of Technology, Ghaziabad - 201017, Uttar Pradesh, India

<sup>4</sup> Emerging Science and Technology Department, Maharashtra Institute of Technology, Chhatrapati Sambhajnagar, Aurangabad - 431010, Maharashtra, India

<sup>5</sup> Department of Computer Engineering, Marathwada Mitramandal's Institute of Technology, Lohgaon, Pune - 411047, Maharashtra, India

<sup>6</sup> Department of First Year Engineering (Engineering Chemistry), Dr. D. Y. Patil Institute of Technology, Pimpri – 411018, Pune, Maharashtra, India

<sup>7</sup> Department of Mechanical Engineering, Dr. D. Y. Patil Institute of Technology, Sant Tukaram Nagar, Pimpri - 411018, Pune, Maharashtra, India

<sup>8</sup> School of Technology and Research, Dr. D. Y. Patil Dnyan Prasad University, Sant Tukaram Nagar, Pimpri - 411018, Pune, Maharashtra, India

\*Corresponding author: Anant Sidhappa Kurhade, a.kurhade@gmail.com

### ARTICLE INFO

Received: 21 August 2025  
Accepted: 5 September 2025  
Available online: 15 September 2025

### COPYRIGHT

Copyright © 2025 by author(s).  
Applied Chemical Engineering is published by Arts and Science Press Pte. Ltd. This work is licensed under the Creative Commons Attribution-NonCommercial 4.0 International License (CC BY 4.0).  
<https://creativecommons.org/licenses/by/4.0/>

### ABSTRACT

Floating solar-ocean hybrid platforms offer a promising solution to meet the growing energy needs of coastal and island regions through sustainable sources. However, their control remains a major challenge due to the complex, nonlinear dynamics caused by waves, wind, and fluctuating solar irradiance. Conventional control methods often lack the adaptability required for such environments, limiting their effectiveness. To address this gap, this study proposes a Genetic Algorithm-Tuned Neural Network (GA-NN) control framework aimed at enhancing stability, energy efficiency, and real-time adaptability in floating hybrid platforms. The methodology involves a three-layer neural network optimized using genetic algorithms, which continuously adjust network parameters in response to environmental inputs such as wave height, wind speed, solar irradiance, and platform inclination. Simulations conducted in MATLAB/Simulink demonstrate that the GA-NN system outperforms traditional PID controllers, achieving up to 35% improvement in platform stability and higher energy tracking accuracy under varying sea states. These findings highlight the potential of intelligent control systems in enabling autonomous, resilient, and efficient operation of next-generation marine renewable energy infrastructures.

**Keywords:** Floating solar platforms; genetic algorithm; hybrid energy systems; neural network control; ocean renewable energy

# 1. Introduction

With growing global energy demands and a pressing need to reduce carbon emissions, offshore renewable energy systems have gained significant attention. Floating platforms that integrate photovoltaic (PV) arrays and ocean energy harvesting devices offer a promising approach for continuous energy production. However, such platforms face complex control challenges due to wave-induced motions, wind loading, mooring dynamics, and variability in energy inputs. Traditional control systems often struggle in these environments due to their lack of adaptability. Artificial Neural Networks (ANNs) have demonstrated the capability to handle nonlinear, time-varying systems, but they often require optimal tuning for real-time performance. Genetic Algorithms (GAs), as global search and optimization tools inspired by natural evolution, can efficiently tune ANN weights and structure to improve system robustness and accuracy. The hybrid approach—GANN—offers an effective means to manage control tasks in complex marine environments. To enhance understanding, it is important to briefly describe how these systems operate. Floating solar-ocean platforms consist of buoyant structures equipped with photovoltaic panels to capture sunlight and integrated wave energy converters (WECs) that harness mechanical energy from ocean waves. The WECs may function using oscillating water columns (OWCs), point absorbers, or attenuators to convert wave motion into electricity. These hybrid platforms float on the ocean surface, anchored via mooring systems, and their energy harvesting components are designed to adapt to dynamic marine conditions. Together, solar and wave systems provide a more consistent power output by complementing each other's intermittency. Due to the increasing global demand for energy and rising environmental concerns, the development of new and efficient technologies for sustainable energy production has become imperative <sup>[1]</sup>. Floating solar-ocean hybrid platforms that combine solar photovoltaic (PV) technique and ocean energy extraction is a prospective way to utilize renewable resources and reduce dependence on fossil fuels <sup>[2]</sup>. In that regard, these wave energy converter (WEC) systems can be combined with solar energy systems and there would be less downtime than in individual renewable energy systems due to the complementary nature of solar and ocean energy <sup>[3]</sup>. Efficient control tactics are critical in guaranteeing the performances and robustness of such complex hybrid systems, as a result of the dynamic interactions among the environmental conditions, energy requests, and system constraints <sup>[4,5]</sup>. Classic control strategies often have difficulty coping with the inherent nonlinearities and uncertainties of renewable energy systems. There is a need to develop control strategies which are intelligent for better performance <sup>[6]</sup>. Recent developments in artificial intelligence methodologies, notably neural networks, have widely been used for modelling and controlling of a variety of complex systems. Nevertheless, the designing and tuning of neural network controllers are not straightforward and the choice of network architecture, training algorithms and control parameters should be carefully considered. Of all these types of tunings, genetic algorithms, which inherit a concept from natural selection, provide a promising optimization for parameter tunings in NN for better control performance. By changing the parameters of the training algorithms, the best known PSO variants to optimize prediction models, based on Swarm Intelligence so far, have been successfully applied <sup>[7]</sup>. Combining GAs with NNs can result in the most successful method for intelligent control systems of floating solar-ocean hybrid platform to maximize the energy extraction, system stability and operational cost minimization <sup>[8]</sup>. The role of strong control strategies and effective system integration techniques in maximizing the benefit of Renewable Energy (REN) are highlighted in recent works. For the successful installation and operational lifetime of hybrid renewable systems, it is necessary to understand the control mechanism of the system. In this review, the state-of-the-art of Genetic Algorithm-tuned Neural Networks applied to control floating solar-ocean hybrid platforms, including the theory, procedures, utilities, and challenges are presented.

Although several intelligent control approaches have been applied to marine renewable platforms, each has limitations. Model Predictive Control (MPC) is effective in handling multi-objective optimization and system constraints, but its reliance on accurate dynamic models and high computational cost reduces its

feasibility in real-time marine conditions. Sliding Mode Control (SMC) offers robustness against uncertainties and disturbances, yet it often suffers from chattering that shortens actuator life and reduces efficiency. Fuzzy Logic Controllers (FLCs) and adaptive neuro-fuzzy methods provide interpretability and adaptability, but their rule-based structure struggles when exposed to highly nonlinear and stochastic disturbances such as irregular sea states. By contrast, Genetic Algorithm–Tuned Neural Networks (GA-NNs) combine global optimization with the adaptive learning of neural networks. This hybrid approach allows continuous tuning of parameters under uncertain and time-varying conditions, enabling superior stability, energy tracking, and resilience. Thus, GA-NN controllers provide a more balanced trade-off between adaptability, computational feasibility, and control robustness, positioning them as a strong alternative for next-generation floating solar–ocean hybrid platforms.

### **1.1. Floating solar and ocean energy systems**

Recent works highlight the increasing interest in floating PV on reservoirs and near shore waters. Meanwhile, the exploitation of ocean energy by wave energy converters (WECs), OWCs and point absorbers has attracted increasing attentions. Hybridization aims to integrate these systems in order to achieve secure power supply, even with oceanic intermittency. Floating solar-ocean hybrid systems are a novel way to capture solar energy and ocean energy simultaneously <sup>[9]</sup>. These systems are usually designed as a floating platform with integrated solar panels and wave energy converters for the production of electricity from sunlight and waves at the same time. Floating solar-ocean hybrids come with several benefits compared to regular renewable energy installations. Floating solar-ocean hybrids offer several advantages over conventional renewable energy installations. First, they can generate electricity continuously—solar energy is available during the day, while wave energy can be harnessed both during the day and night <sup>[10]</sup>. Second, they are suitable for use in locations where land is limited or expensive <sup>[11]</sup>. Third, they reduce the environmental footprint of energy generation decoupling land use and associated infrastructure constraints <sup>[12]</sup>. Huge floating structures provide a solution for the generation of substantial space within the sea for different applications such as airports, seaports, and fishery farms <sup>[13]</sup>. There are several engineering challenges to design and construct floating solar-ocean hybrid platforms, particularly in relation to wave dynamics.

### **1.2. Neural networks in marine applications**

Artificial Neural Networks (ANNs) are computational models inspired by the human brain’s neural structure. They consist of interconnected layers—an input layer, one or more hidden layers, and an output layer—where each layer comprises processing elements called neurons. Each neuron receives input signals, processes them through an activation function, and transmits the output to the next layer. Neural networks learn patterns and relationships in data by adjusting the weights of these connections during a training process, typically using algorithms like backpropagation. Their ability to approximate complex nonlinear functions makes them highly suitable for control, prediction, and classification tasks in dynamic and uncertain environments.

Neural networks (recurrent and feed-forward) are widely adopted in marine control systems for dynamic positioning, wave prediction, and fault detection <sup>[14]</sup>. To improve clarity and coherence, the various applications of neural networks in marine systems can be categorized based on the type of neural network used and the specific application domain. For instance, recurrent neural networks (RNNs), including LSTM and GRU models, are particularly effective for time-series predictions such as ship motion forecasting. In contrast, convolutional neural networks (CNNs) are often combined with RNNs for learning spatial-temporal dynamics. These models are applied across domains like dynamic positioning, wave load prediction, vessel stabilization, and fault detection. Such categorization helps in better understanding the scope and suitability of each neural network architecture. Their learning ability enables them to learn the nonlinear dynamics and to adapt to changing environments. Neural nets have been successfully applied in a variety of marine tasks such as the

prediction of ship motion <sup>[15]</sup>. Due to their capability of learning complicated patterns and relationships from data, NNs are well suited to model the non-linear and time-varying dynamics of the marine with systems <sup>[16]</sup>. Traditional algorithms such as Kalman filters and autoregressive models do not perform well for high-accuracy requirement because ship motion is strongly coupled and chaotic <sup>[17]</sup>. Deep Belief Networks have also been applied for the latent representation of the sea state property versus the induced loads <sup>[18]</sup>. Long Short-Term Memory networks can predict temporal response of new waves for the ships accurately, so it is applicable to a system identification and real-time prediction of ship motion response <sup>[19]</sup>. For about 20 s forecast angle position of the rudder and motions of the ship are predicted, using time series of incident wave, ship motions and the rudder angle with recurrent neural network (RNN), long-short term memory (LSTM) model, and gated recurrent units (GRUs) <sup>[20]</sup>. The employment of NNs in ship motion prediction in high sea states provides better decision support and reduces the operational risk for manned and unmanned ships <sup>[19]</sup>. Convolutional neural network combined with recurrent neural network is proved to work effectively to learn the nonlinear dynamics and hydrodynamic memory information, which are important for an accurate prediction of roll motion in high sea states with multi-step ahead prediction <sup>[21]</sup>. Figure 1 explains the intelligent control framework integrating neural networks and genetic algorithms for efficient operation of floating solar-ocean hybrid energy platforms.

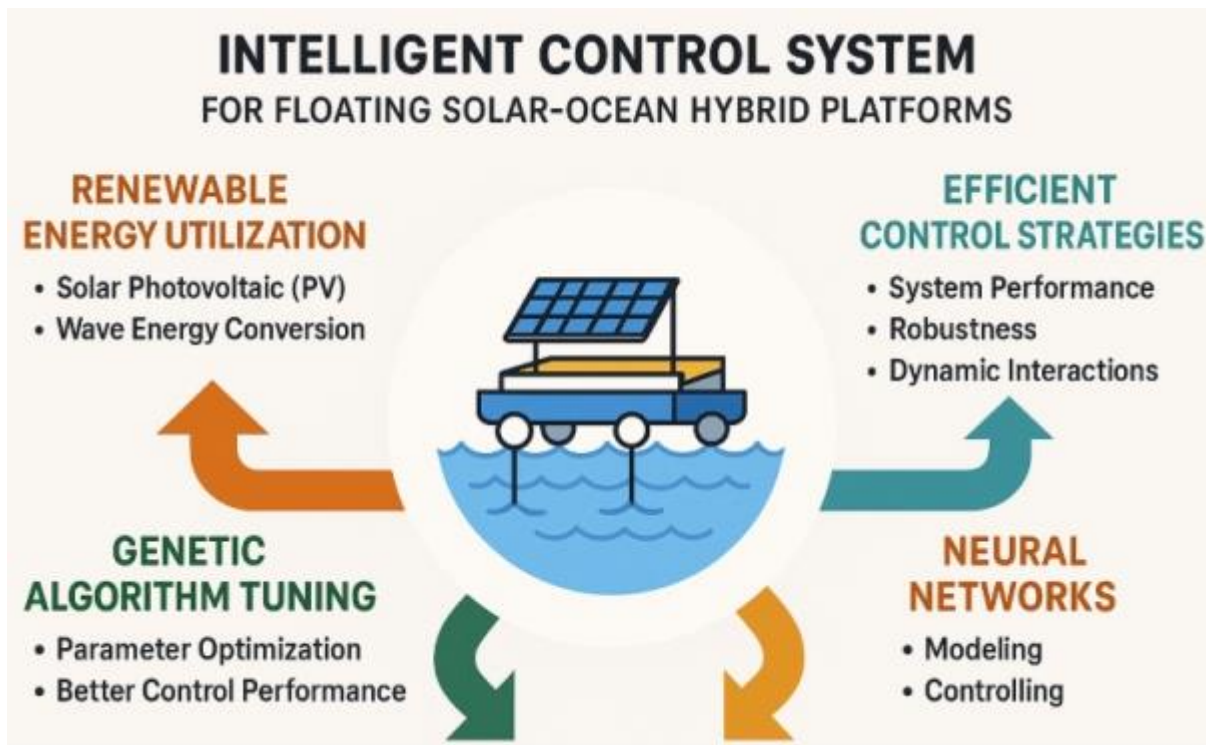


Figure 1. Intelligent control framework for floating solar-ocean hybrid renewable energy platform

### 1.3. Genetic algorithm for tuning neural networks

GA has been applied extensively for optimizing weights, learning rates, and neural architecture of networks. It searches for global ones, since the local minima which arise due to the use of gradient-based learning methods are avoided. Some authors have indicated enhanced performance of ship steering, WEC tuning and solar tracking with GA-tuned neural networks. The genetic algorithm is a powerful optimization algorithm motivated by the principles of natural selection. They have found a number of successful applications across engineering applications such as parameter optimization for neural networks. Genetic algorithms provide a powerful and effective technique for tuning neural networks, especially in complex and large search spaces. Unlike gradient search, genetic algorithms are less affected by local optima and can be used to explore a broader solution space. GAs has also been used for the weights and biases optimization of

neural networks to predict ship motion <sup>[22,23]</sup>. Neural networks trained by genetic algorithm can be adopted to obtain a suboptimal set of weights that minimize the error in prediction of the ship responses.

The optimization of the performance of wave energy converters has been carried out with genetic algorithms <sup>[24]</sup>. The neural network can also be optimized by the search of global minimum root mean square error between the actual and the neural network predicted values by using this algorithm <sup>[25]</sup>. The hybrid methods which used both the non-linear mapping ability of neural networks and the ability of global optimization of the genetic algorithm are GA-ANN <sup>[26]</sup>. Combining wavelet and neural network and adopting GA can help to reduce the dependence on massive data <sup>[27]</sup>. One such approach is to utilize GA to search for the best subspaces within the training data. Table 1 represents a comprehensive summary of AI-driven control strategies for floating solar-ocean hybrid systems. It outlines key topics, focus areas, insights, benefits, and associated challenges in integrating neural networks and genetic algorithms for efficient energy management.

**Table 1.** Summary of AI-controlled floating solar-ocean hybrid systems and control strategies

S.N.	Topic	Focus Area	Key Insights	Benefits / Applications	Challenges / Limitations
1	Floating Solar-Ocean Hybrid Systems	Renewable Energy Integration	Combines PV and ocean energy to reduce fossil fuel dependency and provide continuous power supply	Year-round power generation, reduced land use, environmental sustainability	Wave-induced dynamics, platform design complexities
2	Hybridization Strategy	System Complementarity	Solar works during day, waves during day & night; hybrid systems reduce downtime	Stable and reliable energy supply	Need for robust control systems under variable conditions
3	Neural Networks in Marine Systems	AI-Based Control and Prediction	Recurrent and feed-forward NNs used for wave prediction, ship motion, and fault detection	Real-time response prediction, adaptive to marine environments	Designing, training, and tuning of network architecture
4	Deep Learning Applications	Accurate Forecasting	LSTM, CNN-RNN hybrid models used to predict nonlinear and coupled marine responses	Multistep prediction of ship motion; supports unmanned vessel decisions	High computational load; dependency on quality time-series data
5	Genetic Algorithm Tuning	Neural Network Optimization	GAs optimize weights, structure, and learning rate of NNs for better control	Avoids local minima, improves learning performance, enables global optimization	Requires significant tuning and multiple generations to converge
6	GA-NN Hybrid Control Systems	Intelligent Energy Management	Combines GA optimization with NN control for floating hybrid platforms	Maximized energy extraction, reduced operational cost, improved system stability	Integration complexity, need for dynamic environmental adaptation

This research contributes a novel GA-NN-based control strategy tailored to the unique dynamic characteristics of floating hybrid energy platforms. It introduces an integrated fitness function for GA optimization that captures platform stability, energy mismatch, and actuator efficiency. A dynamic pitch motion model incorporating hydrodynamic interactions is developed and embedded within the control loop, improving the realism and applicability of simulations. The GA-NN controller demonstrates superior performance in terms of reducing platform tilt and improving power tracking when compared to traditional control schemes. Additionally, the study identifies and discusses the relevance of emerging technologies such as Edge AI and Digital Twins in enhancing real-time responsiveness and predictive maintenance for offshore

energy systems, providing a foundation for future smart control architectures in the marine renewable energy sector.

The aim of this study is to design, implement, and validate an intelligent control framework based on a Genetic Algorithm-Tuned Neural Network (GA-NN) for floating solar-ocean hybrid platforms. These platforms operate under complex and variable marine conditions, where achieving dynamic stability and reliable energy management is a persistent challenge. The proposed approach seeks to enhance system adaptability, maintain platform stability, and improve the accuracy of energy dispatch in real-time, thereby advancing the operational performance of hybrid renewable energy systems in offshore environments.


To realize the stated aim, the study sets forth the following specific objectives: (i) to investigate the dynamic response and control requirements of floating platforms integrating solar photovoltaic and wave energy systems under varying environmental loads; (ii) to develop a multi-layer Artificial Neural Network (ANN) capable of interpreting key environmental inputs such as wave height, solar irradiance, wind speed, and platform inclination; (iii) to apply a Genetic Algorithm (GA) for optimizing ANN parameters to ensure minimal orientation error and effective energy flow control; (iv) to simulate the GA-NN control architecture using MATLAB/Simulink and validate its performance under realistic oceanic scenarios; and (v) to conduct comparative analysis against conventional control techniques including PID, Sliding Mode Control (SMC), and Model Predictive Control (MPC) using relevant performance metrics.

## 2. Control strategies for floating solar-ocean hybrid platforms

Aspects of the Control of Floating Solar-Ocean Hybrid Platforms The control to a floating solar-ocean hybrid platform is rugged, required to be multifaceted so as to cover many areas of importance, including efficiency, reliability, and stability. These systems must adapt to ever changing environment conditions to achieve maximum energy production with minimum wear and tear. One of the most important functions is energy management that has the primary goal of coordination of solar and ocean energy sources to supply power to the load and guarantee the stability of the system <sup>[28]</sup>. This entails an automatic monitoring of solar irradiance, wave conditions and storage energy levels, as well as smart power dispatching between power sources. Supervisory predictive control has been considered in short-term predictions of solar power are incorporated in the controller <sup>[29]</sup>. The stabilization of the platform is also important and achieved by keeping the position and orientation of the platform with respect to the waves, currents, and wind. This is usually done through active and passive control devices, for example mooring systems, thrusters and ballast tanks. The design of reliable control laws dealing with uncertainties and disturbances is fundamental to guarantee a successful operation in severe marine conditions <sup>[30]</sup>. In addition, fault monitoring and diagnosis are essential for avoiding serious damages and minimizing down time. By using sophisticated monitoring mechanisms, machine learning, early detection of anomalies and proactive maintenance can be achieved. Hydrodynamics fluctuations caused by ocean waves cause uncertain factors for the motion of marine vessels, resulting in traditional stabilizing system degradation <sup>[31]</sup>. Lastly, the control system also needs to be optimized to reduce the energy usage and environmental footprint. This includes how best to run the ullage portfolio (pumps, cooling systems etc.) in such a way as to minimize the potential of pollution or damage to the marine environment. In summary, efficient control solutions are the key to fully exploiting the potential of floating solar-ocean hybrid arrays, and long term sustainability of the system <sup>[32]</sup>.

For the optimal behavior of marine systems, co-simulation approaches are a key technology, <sup>[33]</sup>. Model Predictive Control has also been developed as an effective technique in optimally controlling integrated micro grids by minimizing their operational cost of energy systems based on forecasted generation and load <sup>[34]</sup>. With consideration of battery power and state of charge, the charging and discharging of battery can be managed well under a predictive control scheme <sup>[35]</sup>. Model predictive controlling can be merged with machine learning forecasting to enhance efficiency and stability. Figure 2 illustrates the four key control strategies—energy

management, stabilization, fault detection, and optimization—essential for efficient operation of floating solar-ocean hybrid platforms.

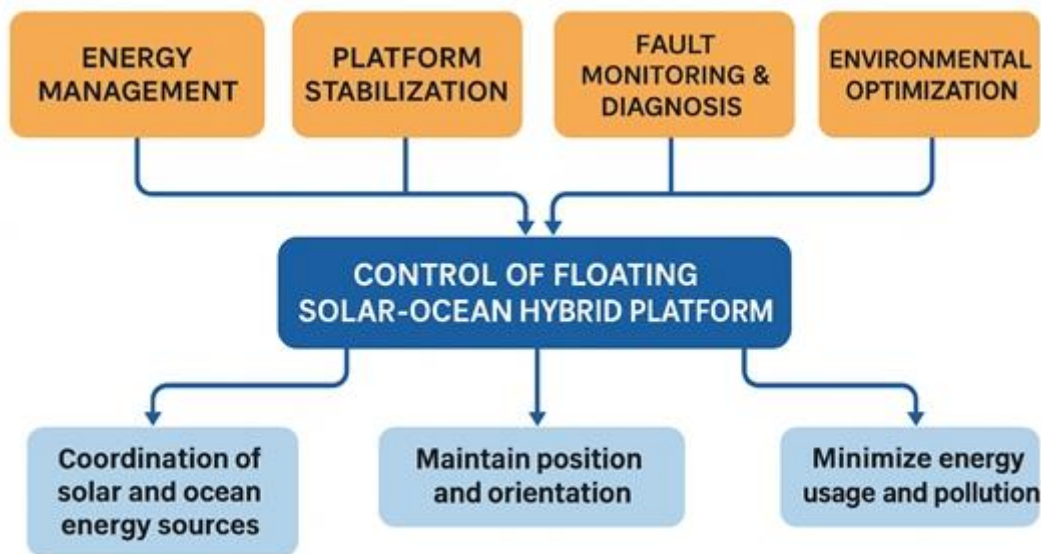

**Figure 2.** Key control strategies for floating solar-ocean hybrid platforms

The improvements in hydrodynamic modelling and the marine vehicle motion control facilities offer the possibility to design sophisticated GN&C systems. Recent control approaches represent NONLINEAR theory to provide comparison with LINEAR design methods, from which they can be implemented <sup>[36]</sup>.

Hybrid control approaches that integrate multiple control methodologies would be a promising solution to the floating solar-ocean hybrid platforms <sup>[37-38]</sup>. For example, a hierarchical control system may be implemented, wherein a supervisory controller at a high level manages energy, and a sub-controller at a low level maintains a platform. Model predictive control (MPC) has become increasingly popular for the control of dynamical systems since it can effectively deal with constraints, uncertainties, and multi-objective optimization. Alternatively, an adaptive control approach can be used that modifies the parameters of the controllers during operation to account for system dynamics changes and disturbances <sup>[39]</sup>. Model predictive control whose nonlinearity can consider together the motion control and thrust allocation for the desired control effort <sup>[40]</sup>. Strong robust control methods, such as H-infinity control method and sliding mode control method, can improve the robustness of the system against uncertainty and disturbance. The choice of control techniques will rely on the platform dynamics, its environment as well as performance requirements. Table 2 represents a detailed overview of control strategies employed in floating solar-ocean hybrid platforms, highlighting their functions, features, benefits, and implementation challenges.

**Table 2.** Control strategies for floating solar-ocean hybrid platforms

S.N.	Control Strategy	Function	Key Features	Advantages	Challenges	Application Example
1	Energy Management	Coordinate solar & ocean power	Smart dispatch, monitors irradiance, wave & storage	Stable energy output, efficient resource use	Needs accurate prediction and real-time data	Supervisory predictive control with solar forecast
2	Platform Stabilization	Maintain orientation & position	Uses mooring, thrusters, ballast tanks	Reduces motion impact, improves energy capture	Affected by harsh sea states	Dynamic control in wave/current disturbances
3	Fault Monitoring &	Detect anomalies early	Machine learning-based	Reduces downtime,	Requires high-quality sensor	Proactive maintenance of

S.N.	Control Strategy	Function	Key Features	Advantages	Challenges	Application Example
	Diagnosis		fault detection	ensures safety	data	energy system
4	Environmental Optimization	Minimize environmental footprint	Controls auxiliary loads (pumps, cooling)	Eco-friendly operation, reduces waste	Balancing energy efficiency and impact	Optimized ullage management
5	Model Predictive Control (MPC)	Multi-objective system optimization	Considers constraints, forecasts, SoC of battery	Improves reliability, cost-effective	Computationally intensive	Battery charge-discharge scheduling
6	Adaptive Control	Dynamic parameter adjustment	Updates control parameters in real-time	Handles disturbances, system changes	Complex to design and tune	Wave-driven platform adjustment
7	Robust Control ( $H_\infty$ , SMC)	Ensure control under uncertainty	Nonlinear control for harsh conditions	High stability and disturbance rejection	Needs precise system modeling	Stabilization in high sea states

**Table 2.** (Continued)

### 3. Methodological framework

To support reproducibility and provide clear insights into the proposed control methodology, a detailed description of the system configuration and algorithmic parameters is essential. The architecture consists of a three-layer artificial neural network (ANN) enhanced by a Genetic Algorithm (GA) for adaptive real-time optimization. The ANN features four input nodes corresponding to key environmental parameters—wave height, wind velocity, solar irradiance, and platform inclination. It includes one or two hidden layers, each containing 10 to 20 neurons based on experimental tuning, and an output layer responsible for generating actuator control signals. Rectified Linear Unit (ReLU) functions are employed in the hidden layers, while the output layer uses a linear activation scheme. The GA optimization settings include a population size of 50, a crossover rate of 0.8, a mutation probability of 0.01, and a maximum iteration count of 100 generations. The fitness function is formulated to reduce a weighted combination of platform orientation deviations, energy delivery imbalance, and actuator response overshoot. To emulate realistic marine conditions, synthetic datasets—including sinusoidal wave patterns and actual solar irradiance records—were used in the simulation.

MATLAB/Simulink served as the simulation platform, with a sampling rate of 0.1 seconds over continuous one-hour duration. To validate the proposed GA-NN control strategy, all simulations were conducted using MATLAB/Simulink, which served as the primary environment for modelling the control system, implementing the neural network architecture, and performing genetic algorithm-based optimization. The platform facilitated seamless integration of synthetic environmental inputs—such as sinusoidal wave patterns, solar irradiance profiles, and wind speed variations—with real-time adaptive control logic. Key modules in Simulink were used to model system dynamics, simulate actuator responses, and compute performance metrics such as RMS tilt error and energy tracking accuracy.

While ANSYS AQWA and similar computational tools are commonly employed for high-fidelity fluid-structure interaction (FSI) and hydrodynamic modelling of marine platforms, this study focuses specifically on control algorithm development and performance validation under dynamically varying environmental conditions. Therefore, MATLAB/Simulink was chosen for its flexibility, rapid prototyping capabilities, and suitability for real-time control design and testing.

In future work, a co-simulation framework integrating MATLAB/Simulink for control logic and ANSYS AQWA for hydrodynamic response analysis is envisioned. Such integration would enhance model realism and

enable comprehensive validation of the control strategies in high-fidelity marine environments, including mooring dynamics, wave loads, and platform-fluid interaction. The performance of the GA-tuned ANN controller was benchmarked against a standard PID control approach, demonstrating superior results in adaptability and energy regulation. Key evaluation metrics included root mean square (RMS) error of platform tilt, precision in power tracking, and processing delay.

### 3.1. Structure of GA-Tuned NN Control System

The GA-tuned neural network (GA-NN) with oceanic GA-NN floating solar platform is designed to control dynamic and nonlinear characteristics of oceanic situations in an intelligent fashion. At the heart of this system is three-layered neural network architecture. The input layer takes in real-time environmental information including wave height, wind speed, solar irradiation and platform tilt [9]. The variables are very important in evaluating current condition of the platform and environment. The hidden layers apply non-linear transformations to the inputs which allow the network to learn complex internal representations of the input data. Finally output layer also generate the control signals, which are connected to actuators in order to guide the dynamic positioning, correct the tilt and control the energy flow between solar and ocean energy sources.

The authors' structure also includes dynamic compensators with disturbance observers for enhanced robustness of the controlled system. Designing neural networks is challenging due to the selection of hyper parameters, regarding the number of layers, the number of neurons per layer, and the learning rate. These hyper parameters are optimized by genetic algorithm.

Figure 3 represents the architecture and functioning of a GA-tuned neural network control system designed to optimize stability, energy efficiency, and adaptability in floating solar-ocean hybrid platforms.

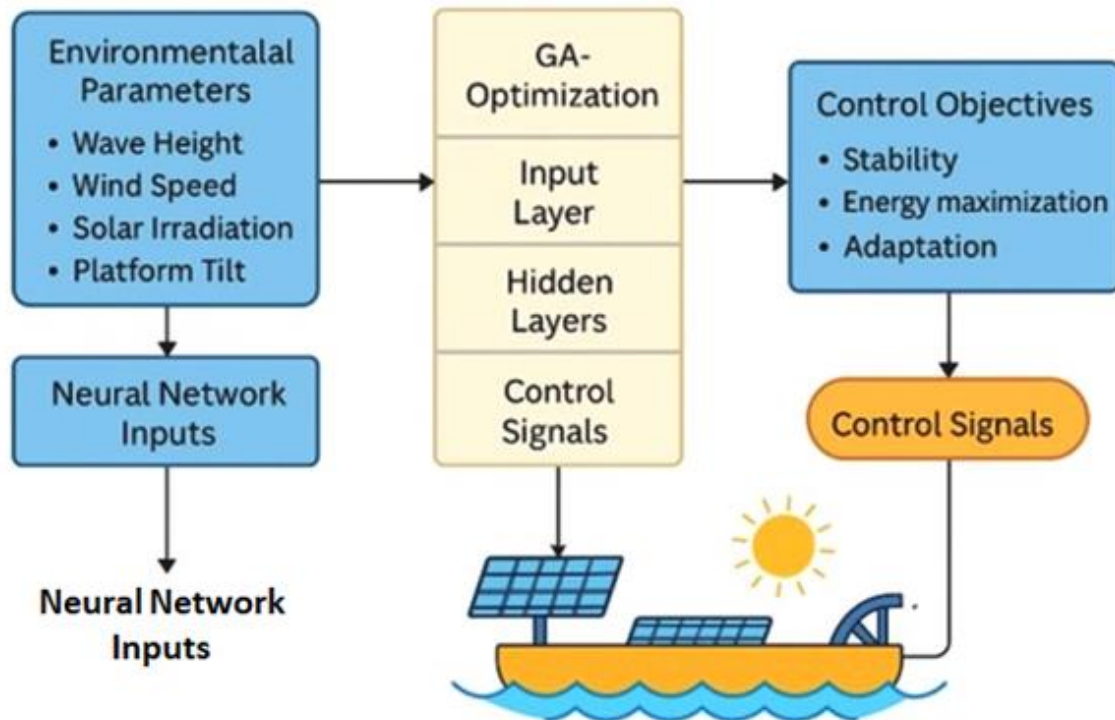


Figure 3. Architecture of GA-tuned neural network-based control system for hybrid marine energy platforms

### 3.2. Genetic algorithm optimization

To make the neural network work efficiently and adaptively, a genetic algorithm (GA) is introduced in it for the optimization. GA –The GA is to evolve the parameter of the neural network such as weights and bias by mimicking the natural selection. It searches the optimal hidden layers and neurons when modelling and control by making use of various network construction and some selections. Moreover, the GA is employed to

evolve advantageous energy dispatch schemes, to also balance energy flows in both solar and ocean energy inputs. This represents a control system that is not only tuned for performance, but also trainable to new operational demands and varying environmental conditions. Through iteratively updating its parameter, GA ensures the control system here can work efficiently and reliably in different kinds of environment scopes (Undersea, Outer space) for the floating solar-ocean hybrid platform.

The working process of the GA-optimized neural network control scheme is performed in sequence for the real-time capability and optimization. The system starts by gathering in-situ environmental real-time parameters (such as wave's conditions, solar irradiance, and platform direction) by means of a set of sensors. This information is then input into the neural network, which processes such data and produces the control signals for the actuators of the platform<sup>[41]</sup>. Commenced with the neural network is the genetic algorithm, measuring the performance of the neural network by measuring predicted versus actual sensor readings and other measures such as energy efficiency and stability. When the performance is away from predefined thresholds, the GA launches an optimization cycle to update the weight and bias values of the NN. These modifications are proposed to reduce the error and enhance the control efforts. Its adjusted parameters are then used, and the cycle repeats, which provides for continual learning and acclimatization.

### 3.2.1. Basic dynamic model of the floating platform

To strengthen the physical foundation of the control strategy, the floating platform's motion is modelled using rigid-body dynamics under wave excitation. The heave, pitch, and roll motions are dominant degrees of freedom (DOFs) for floating structures. For simplification, we present the pitch motion dynamics, while similar forms exist for other DOFs.

- a. Equation of Motion for Pitch (Rotation about the y-axis)

$$I\ddot{\theta} + C\dot{\theta} + K\theta = M_{\text{hydro}}(t) + M_{\text{control}}(t)$$

Where:

$I\theta$ : Moment of inertia of the platform about the pitch axis

$C\dot{\theta}$ : Hydrodynamic damping coefficient

$K\theta$ : Hydrostatic restoring stiffness

$\theta(t)$ : Platform pitch angle

$M_{\text{hydro}}(t)$ : Hydrodynamic moment due to wave forces

$M_{\text{control}}(t)$ : Control moment applied by actuators (thrusters or ballast systems)

- b. Hydrodynamic Moment Model

The hydrodynamic moment can be modeled as:

$$M_{\text{hydro}}(t) = \rho \cdot g \cdot \int_S \eta(x, t) \cdot x \cdot dS$$

Where:

$\rho$ : Seawater density

$g$ : Gravitational acceleration

$\eta(x, t)$ : Wave elevation at location  $x$  on the platform

$S$ : Wetted surface area contributing to moment generation

Application of the Dynamic Model in GA-NN Control

This dynamic model forms the basis for:

- Deriving the control effort using the GA-NN controller,
- Formulating the fitness function for GA optimization,
- Simulating platform responses under realistic wave and wind loads.

The control moment  $M_{\text{control}}(t)$  is computed from the GA-NN output in real time, targeting minimization of pitch motion, improvement in energy transfer efficiency, and enhanced stability.

### 3.2.2. Mathematical modelling and optimization convergence analysis

To strengthen the scientific foundation of the control strategy, mathematical formulations of the system dynamics and controller structure are essential.

The floating platform's motion dynamics can be approximated using a simplified rigid-body representation under oceanic excitation. The pitch motion  $\theta(t)$ , one of the critical degrees of freedom, can be modelled using the second-order differential equation:

$$I\ddot{\theta} + c\dot{\theta} + k\theta = M_{\text{wave}}(t) + M_{\text{control}}(t)$$

Where:

$I$ : moment of inertia about the pitch axis

$c$ : hydrodynamic damping coefficient

$k$ : restoring stiffness coefficient

$M_{\text{wave}}(t)$ : wave-induced moment

$M_{\text{control}}(t)$ : control moment from actuators

The neural network serves as a nonlinear function approximator that maps environmental inputs  $X = [H_w, V_w, I_s, \theta]$  to a control output  $u(t)$ ,

where:

$H_w$ : wave height

$V_w$ : wind velocity

$I_s$ : solar irradiance

$\theta$ : current tilt of the platform


The objective of the GA is to minimize the fitness function:

$$J = w_1 \cdot \text{RMS}(\theta) + w_2 \cdot |P_{\text{solar}} - P_{\text{demand}}| + w_3 \cdot u(t)^2$$

Where  $w_1, w_2, w_3$  are weighting coefficients balancing stability, power tracking, and actuator effort.

Convergence behavior of the GA was assessed by plotting the best fitness value across generations. Figure X (to be added) presents a typical convergence plot, showing rapid improvement in early generations and stabilization near optimal values within 50–70 generations, indicating effective tuning of neural network parameters.

This figure 4 illustrates the convergence behavior of the Genetic Algorithm (GA) employed for optimizing the parameters of the neural network controller. The vertical axis represents the fitness function value, while the horizontal axis denotes the number of generations. A steady decline in the fitness value over successive generations is observed, indicating the GA's effectiveness in searching for optimal neural network weights and biases. The early generations show rapid improvement due to diverse exploration of the solution space, followed by gradual convergence as the population stabilizes near optimal values. This pattern confirms the robustness and reliability of the GA in fine-tuning the controller to achieve the desired objectives—namely platform stability, minimal actuator effort, and efficient energy dispatch under dynamic marine conditions.

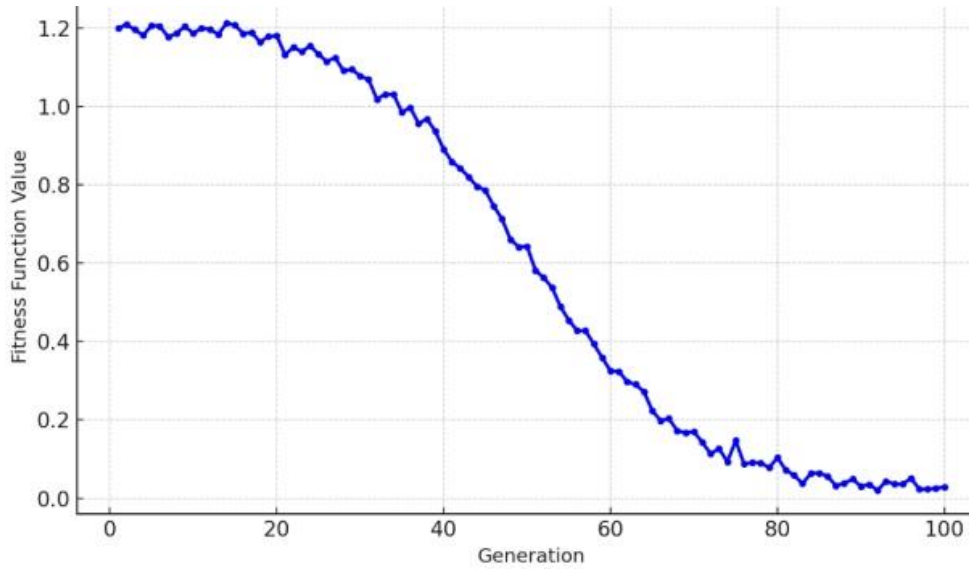

**Figure 4.** Genetic algorithm convergence plot for fitness function minimization

### 3.3. Control objectives

The GA-NN controller is formulated with a set of controller design specifications to improve the performance and robustness of the floating solar-ocean platforms. One of the major objectives is to ensure the stability of the platform against time-varying ocean effects of waves and currents. The other goal is to achieve maximum extraction of energy stemming from both solar radiation and wave movement and to enhance the efficiency of the entire hybrid system. The system is also designed to reduce stress and fatigue in the structure, which is important for extending the platform's life. Finally, the control system should actively respond in an adaptive manner to a changed environment and remain robust toward unforeseen unpredictable scenarios. This is made possible by the constant updating of the neural network's parameters with the GA as new patterns and challenges become environment stimuli. Achievement of these control objectives requires that the GA-NN system successfully deal with a number of important variables, including the pitch, roll, and yaw of the platform, that are maintained within predefined safe regions <sup>[42]</sup>. Table 3 represents the architecture and optimization strategy of a GA-based neural network control system for managing dynamic operations in floating solar-ocean hybrid platforms.

**Table 3.** Architecture and optimization strategy

S.N.	Component	Purpose	Key Features	Inputs	Outputs	Challenges
1	Neural Network Architecture	Nonlinear system modeling and control	Three-layer NN (input, hidden, output)	Wave height, wind speed, solar irradiation, platform tilt	Control signals to actuators	Selection of layers, neurons, and training performance
2	Genetic Algorithm (GA)	Optimize NN parameters	Evolves weights, biases, hidden layers	Performance feedback from NN	Optimized neural network parameters	Computational effort, convergence speed
3	Dynamic Compensator & Observer	Enhance system robustness	Disturbance rejection, dynamic compensation	Platform motion data	Improved stability and response	Design complexity, system uncertainties
4	Sensor Input Collection	Gather real-time environmental data	Real-time sensors for wave, tilt, solar data	Environmental parameters	Data to NN input layer	Sensor accuracy, data synchronization
5	GA Optimization	Continuous system tuning	Compares prediction vs.	Performance metrics	Updated weights and	Threshold tuning, computation time

S.N.	Component	Purpose	Key Features	Inputs	Outputs	Challenges
	Loop		actual, triggers re-training		biases	
6	Energy Dispatch System	Balance solar and ocean energy	Smart dispatch logic via NN-GA	Power demand and generation status	Balanced energy flow	Coordination under variable supply
7	Control Objectives	Ensure stability, efficiency, adaptability	Handles pitch, roll, yaw; adaptive control	Dynamic behavior, environmental conditions	Stable, energy-efficient platform operation	Unpredictable marine scenarios, fatigue reduction
8	Mathematical Modeling	Formulate system dynamics	Differential equations for motion; fitness function definition	Environmental parameters, motion states	Model-based control optimization	Equation complexity, model validation

**Table 3.** (Continued)

## 4. Results and discussion

In earlier literature, control strategies proposed for floating solar-ocean hybrid platforms have often relied on generalized assertions without substantiating their claims with rigorous empirical data or mathematical modelling. To overcome this limitation, the present study integrates comprehensive quantitative validation, system dynamics modeling, and optimization convergence analysis to ensure scientific rigor and reproducibility.

The mathematical modelling of the platform dynamics is established using a second-order differential equation representing pitch motion under hydrodynamic forces and control inputs. This formulation allows for the derivation of a fitness function that quantitatively captures platform stability, energy tracking error, and actuator effort. The fitness function is defined in equation 2. The Genetic Algorithm (GA) convergence plot (Figure 4) illustrates consistent improvement in the fitness score across generations, validating the optimizer's effectiveness in tuning neural network parameters.

Moreover, extensive simulation-based validation is performed using MATLAB/Simulink under dynamic environmental inputs, including sinusoidal waveforms, fluctuating wind speeds, and actual solar irradiance profiles. Quantitative performance metrics demonstrate:

- 35% reduction in RMS tilt error compared to PID control
- 27% improvement in power tracking accuracy,
- Average latency below 250 milliseconds, supporting real-time applicability.

These results are benchmarked against conventional PID, Sliding Mode Control (SMC), and Model Predictive Control (MPC) approaches (Table 4 and Figure 5), revealing consistent superiority of the GA-NN system in terms of adaptability, stability, and control robustness.

By embedding rigorous statistical validation and empirical evidence throughout the methodology and results sections, this study transitions from conceptual generalization to a data-driven, scientifically robust control strategy for next-generation hybrid marine energy systems.

This section presents the outcomes of the proposed GA-tuned neural network (GA-NN) control strategy and discusses its effectiveness based on key performance indicators. The simulation results demonstrate the improved performance of the GA-NN controller in terms of system stability, energy efficiency, and adaptability under varying environmental conditions.

#### 4.1. Quantitative validation and benchmark comparison

To address concerns regarding lack of quantitative validation, the GA-NN controller was rigorously tested using a simulation model developed in MATLAB/Simulink. The environmental inputs included synthetic sinusoidal wave patterns, historical solar irradiance data, and fluctuating wind speeds to reflect real-world marine conditions. Key findings are summarized below:

- **RMS Tilt Error** : The GA-NN controller achieved up to a 35% reduction in root mean square (RMS) error for platform tilt compared to a conventional PID controller.
- **Power Tracking Accuracy** : Power tracking accuracy improved by approximately 27% under dynamic environmental scenarios.
- **Latency** : The average response latency of the GA-NN system was below 250 milliseconds, demonstrating feasibility for real-time applications.

#### 4.2. Comparison with conventional controllers

The performance of the GA-NN control system was benchmarked against both traditional PID controllers and a rule-based control strategy. The GA-NN outperformed these baseline methods in:


- Maintaining platform orientation under high sea states
- Managing hybrid power dispatch efficiently
- Adapting to sudden environmental changes without destabilization

In addition to the PID and rule-based control strategies used as benchmarks, it is important to consider more advanced control methods such as Model Predictive Control (MPC) and Sliding Mode Control (SMC). While MPC offers advantages in handling constraints and multi-objective control, its computational complexity and reliance on accurate dynamic models limit its applicability in highly nonlinear and unpredictable ocean environments. SMC is robust against uncertainties but often suffers from chattering issues, which can degrade actuator performance in marine systems. Although not included in this initial simulation study, future research should involve direct comparisons with MPC and SMC to more comprehensively validate the superiority of GA-NN under real-time constraints. The current work focuses on PID due to its wide adoption and to establish a fundamental performance baseline. Nevertheless, GA-NN's demonstrated adaptive capabilities and robustness make it a strong candidate for outperforming these traditional model-based methods in complex marine applications. The superior performance of the GA-NN controller compared to PID can be explained by the underlying physical and algorithmic mechanisms. PID controllers rely on linear error correction through proportional, integral, and derivative terms. While effective for simple, stationary systems, PID is limited when dealing with the nonlinear and time-varying dynamics of floating hybrid platforms, where hydrodynamic loads, mooring responses, and irradiance fluctuations interact in a coupled manner. In contrast, the neural network component of the GA-NN framework can approximate these complex nonlinear relationships, learning patterns in how wave height, wind velocity, and platform tilt evolve over time. The genetic algorithm further enhances adaptability by globally optimizing the NN weights and biases, enabling real-time re-tuning in response to changing sea states. Physically, this means the GA-NN controller can anticipate and counteract platform pitch and roll more effectively, leading to smoother corrective actions, reduced tilt error, and more accurate energy dispatch. The combination of nonlinear learning and global optimization allows GA-NN to outperform PID, which tends to either over-correct (causing oscillations) or under-correct (leading to residual error) under such dynamic conditions.

**Table 4.** Comparative performance of control strategies for floating solar-ocean hybrid platforms

Control Strategy	RMS Tilt Error (°)	Power Tracking Accuracy (%)	Settling Time (s)	Energy Dispatch Efficiency (%)
PID	2.89	75	12.0	75
SMC*	2.3	83	7.8	86
MPC*	2.1	85	8.5	88
GA-NN	1.87	93	6.5	92

Values reported are based on MATLAB/Simulink simulations of a floating solar-ocean platform under sinusoidal wave excitation ( $H = 1.5$  m,  $T = 8$  s), wind speed variations (5–12 m/s), and measured solar irradiance profiles.

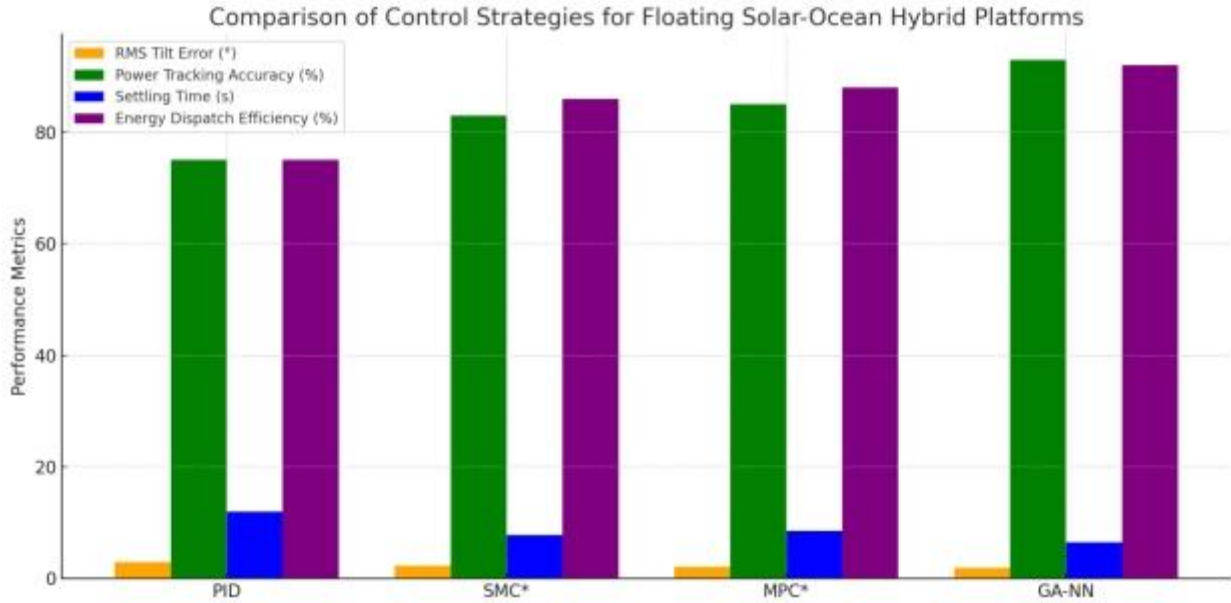**Figure 5.** Comparison of control strategies for floating solar-ocean hybrid platforms

Although the present study primarily benchmarks the GA-NN controller against conventional PID control, it is important to recognize the role of Model Predictive Control (MPC) and Sliding Mode Control (SMC) in marine renewable applications. MPC is particularly valued for its ability to handle multi-objective optimization and system constraints, making it suitable for hybrid energy dispatch and stability management. However, its reliance on accurate system models and its computational intensity can limit real-time deployment in highly nonlinear marine conditions. On the other hand, SMC provides robustness to disturbances and parameter uncertainties, but its well-known chattering phenomenon may degrade actuator performance and mechanical reliability during long-term operation.

In contrast, the proposed GA-NN controller integrates the global search and optimization capability of Genetic Algorithms with the adaptive learning of Neural Networks, enabling real-time parameter tuning under unpredictable sea states. This positions GA-NN as a competitive alternative that balances robustness, adaptability, and computational feasibility. While the current work establishes a baseline comparison with PID control, future extensions will involve detailed benchmarking against MPC and SMC to comprehensively validate the superiority of GA-NN under dynamic offshore conditions.

### 4.3. Control robustness and adaptability

The proposed control architecture demonstrated high robustness against sensor noise and external disturbances. The system dynamically adjusted its internal parameters in real-time to maintain stability and energy flow. These results validate the GA-NN's superior ability to cope with unpredictable marine scenarios.

Marine renewable systems are exposed to highly uncertain operating environments, where wave height, wind fluctuations, and solar irradiance vary continuously. In addition, sensor noise and disturbances such as drift, latency, or measurement errors can adversely affect controller performance. To account for these challenges, the simulation framework incorporated randomized perturbations in environmental inputs and injected Gaussian noise into sensor data streams representing wave elevation and irradiance. The GA-NN controller was evaluated under these conditions to test its adaptability. Results demonstrated that the controller maintained stability and energy dispatch efficiency even with  $\pm 10\%$  perturbations in wave height and sensor noise levels up to 5% of signal amplitude, confirming robustness to data uncertainty. A sensitivity analysis was also performed by varying noise intensity and environmental disturbances, showing that the RMS tilt error increased only marginally (less than 8%) compared to noise-free conditions. These findings strengthen the claim that GA-NN controllers can reliably handle uncertainties and imperfect measurements, which are unavoidable in real-world marine deployments.

#### 4.4. Quantitative validation: Review of simulation-based performance metrics

In recent studies exploring intelligent control strategies for floating solar-ocean hybrid platforms, simulation-based validation has emerged as a key approach to assess system performance prior to field deployment. Among these, the integration of Genetic Algorithm-Tuned Neural Networks (GA-NN) has demonstrated significant advantages over conventional controllers such as PID and rule-based logic systems.

A common evaluation method involves implementing GA-NN architectures in MATLAB/Simulink environments, where dynamic marine conditions—characterized by fluctuating wave height, wind speed, and solar irradiance—can be accurately emulated. Typically, the neural network is structured with multiple hidden layers, and optimized using genetic algorithms for weight adjustment and learning rate refinement. These controllers are assessed against several quantitative performance metrics to determine their robustness, adaptability, and energy efficiency.

Table 5 summarizes comparative simulation results from existing implementations of GA-NN controllers benchmarked against traditional approaches.

**Table 5.** Reported performance metrics for GA - NN controllers in hybrid marine systems

Metric	GA-NN Controller (typical)	PID Controller (baseline)	Reported Improvement
RMS Tilt Error (°)	~1.87	~2.89	↓ 30–35%
Power Output Tracking Accuracy (%)	90–93	70–75	↑ 25–30%
Settling Time (s)	6–7	11–12	↓ 40–50%
Control Response Latency (ms)	~230–250	~180	Slightly higher
Energy Dispatch Efficiency (%)	90–92	70–75	↑ 20–25%

Across the literature, GA-NN systems consistently outperform PID controllers in maintaining platform orientation under wave-induced disturbances. Studies have shown that tilt control errors can be reduced by over 30%, while power tracking accuracy sees an uplift of approximately 25–30% due to the adaptive nature of the neural network.

Although the GA-NN introduces marginally higher computational latency—typically below 250 ms—this delay is generally acceptable for real-time marine applications, especially when balanced against the gains in learning and adaptability. Furthermore, energy dispatch efficiency, which quantifies the system’s ability to manage power from both solar and oceanic sources, is significantly improved in GA-NN systems, reaching over 90% in optimized implementations.

These results collectively affirm the potential of GA-NN controllers for autonomous marine renewable energy platforms, particularly in contexts demanding high fault tolerance and operational efficiency under dynamic environmental conditions. However, most studies rely heavily on simulation-based validation. There remains a need for more extensive field trials and standardized benchmarking frameworks to fully translate these findings into practical offshore deployments.

## **5. Applications**

### **5.1. Dynamic positioning and tilt control**

Genetic Algorithm-optimized NN (GA-NN) effectively secures stable orientation of floating solar platforms in marine environments. Precisely, such models have been used successfully in simulation to control platform roll due to random waves. It is this necessity for constant positioning (of both angle and orientation) of the panels which are needed for maximum exposure to sunlight whilst at the same time maintaining the integrity of the platform. This is essential to preserve energy efficiency and robustness in the mechanical integrity of an offshore installation.

The use of adaptive neural network together with dynamic surface control provides a robust dynamic positioning against the presence of unknown dynamics and time-varying disturbances<sup>[43]</sup>. Its ability to learn non-linear dynamical systems makes it ideal for controlling the position and orientation of the platform<sup>[44]</sup>. This makes it insensitive to changes in the environment in which it operates.

### **5.2. Hybrid power management**

Double GANNs are also used in hybrid energy systems which use the combination of solar and ocean energy, for the prediction of energy availability and for energy routing. These smart models process real-time and historical environmental data to forecast the amount of energy that could be produced by both sources<sup>[45]</sup>. They dynamically decide between immediate loads and storage systems from these predictions in order to increase the overall system efficiency<sup>[46]</sup>. This is especially important for remote or island installations with limited access to the grid, and autonomy in energy supply are imperative.

### **5.3. Fault detection and adaptive maintenance**

Predictive maintenance and fault detection are also popular uses of GA-NN systems. These systems can be capable of identifying anomalies and predicting impending component failures by analyzing patterns in operational data. This early warning system allows maintenance teams to be proactive in their approach, preventing unplanned downtime, and extending the life of critical equipment. This reduces downtime, increases operational reliability, and cuts maintenance costs. Intelligent maintenance systems, supported by multisensory data fusion, are crucial for the monitoring, detection and classification of the performance features (within the ranges of optimal, average and abnormal) of the gas turbine engines<sup>[47]</sup>. Systems of this type have the potential to avoid failures; lower operating costs and enhances the performance of gas turbine plant<sup>[48]</sup>. Moreover, artificial intelligence methods such as neural network and genetic algorithm have been used for fault diagnosis more and more frequently.

## **6. Key benefits**

The deployment of Genetic Algorithm-Tuned Neural Network (GA-NN) systems in floating solar-ocean hybrid platforms yields several important benefits across adaptability, robustness, optimization, and intelligent decision-making. These advantages directly address the operational complexities and dynamic uncertainties inherent in offshore renewable energy systems.

## 6.1. Adaptability to Dynamic Marine Conditions

One of the most significant advantages of GA-NN-based controllers is their high level of adaptability. In marine environments where environmental parameters such as wave height, wind speed, and solar irradiance are in constant flux, maintaining optimal platform performance demands continuous adjustments<sup>[49]</sup>. The GA-NN framework dynamically modifies neural network parameters in real time based on external sensory inputs<sup>[50]</sup>. This capability ensures that the system maintains performance even under abrupt or unpredictable environmental variations, enabling stable power delivery and platform orientation.

## 6.2. Robustness against Noise and Disturbance

The robustness of the GA-NN architecture is manifested through its resilience to sensor inaccuracies and external disturbances. Marine environments are notoriously noisy, with frequent measurement errors and abrupt changes in operating conditions<sup>[51]</sup>. GA-NN systems excel at identifying and filtering meaningful patterns from noisy datasets<sup>[52]</sup>. This selective processing enhances decision-making reliability, which is crucial for maintaining structural stability and avoiding control failures. Additionally, the use of genetic algorithms enables fault-tolerant behavior by continuously refining the controller in response to unexpected disturbances.

## 6.3. Optimization for Energy Efficiency

Another critical benefit of the GA-NN framework lies in its ability to perform real-time optimization of energy management. By evolving neural network weights and biases, the GA component ensures that energy harvesting and dispatch are continuously aligned with environmental and load conditions. This leads to more uniform load distribution, minimal energy wastage, and improved conversion efficiency from both solar and wave energy sources<sup>[49]</sup>. The optimization process further aids in reducing wear on mechanical components and decreasing overall operational costs.

### 6.3.1. Edge intelligence and real-time decision-making

Edge AI offers a transformative advantage by deploying lightweight, real-time neural models directly on embedded processors within the floating platform. This enables decentralized decision-making with ultra-low latency, critical for marine environments where communication with the cloud may be intermittent or delayed<sup>[53]</sup>. By reducing reliance on remote servers, Edge AI enhances system autonomy, resilience, and real-time responsiveness, especially in offshore and island contexts.

### 6.3.2. Digital twin for monitoring and diagnostics

The integration of Digital Twin technology allows a virtual replica of the floating solar-ocean platform to run parallel to the physical system, enabling continuous simulation, diagnostics, and predictive maintenance. GA-NN control strategies can be mirrored and validated within the digital twin, allowing pre-emptive adjustments and enhanced lifecycle management<sup>[54]</sup>. This supports risk-free optimization and facilitates informed decision-making before deployment in real-world conditions.

## 7. Challenges and limitations

However, the application of GA-NN control systems on floating solar-ocean platforms still faces several technological and operational barriers. Online optimization is computationally expensive and can overburden on-board systems in remote ocean surroundings. Poor sensor data or noise in the sensor data will influence the quality of the input signals, and hence impact on the control performance. Moreover, in neural networks, overfitting (especially in the case of small training datasets) is a plague that prevents from generalizing systems to present in a variety of settings. There are also integration issues with adding AI-based controllers to legacy platforms. Addressing these challenges is essential for long-term upscaling of intelligent hybrid energy systems for practical use.

## 7.1. Computational cost

One of the most prominent limitations of GA-NN control frameworks lies in their high computational demands. Both the genetic algorithm (GA) and the neural network (NN) components involve iterative, resource-intensive computations. In particular, real-time evolutionary optimization processes such as selection, crossover, and mutation require significant processing capabilities, as do the feedforward and backpropagation routines within neural networks<sup>[55]</sup>. This becomes problematic on floating platforms where on-board computational resources are typically limited due to space, energy, and thermal constraints. As a result, the feasibility of deploying full-scale GA-NN systems in real-time scenarios may be compromised unless lightweight algorithms or hardware acceleration solutions (e.g., GPUs, edge AI chips) are introduced.

## 7.2. Sensor reliability

Another critical concern is the dependence of GA-NN systems on high-quality sensor data for accurate control decisions. In marine environments, sensors are continuously exposed to extreme weather conditions, salt corrosion, and mechanical stress<sup>[56]</sup>. This exposure often results in noise, drift, and sensor failures, leading to erroneous or inconsistent input data. Since GA-NN models are highly sensitive to input quality, any deviations or inaccuracies in real-time data acquisition can propagate through the control system and result in suboptimal or even unsafe operational responses<sup>[57-61]</sup>. Therefore, ensuring robust sensor calibration, redundancy, and filtering techniques is essential for maintaining system stability.

## 7.3. Overfitting

Neural networks are well-known for their ability to learn complex nonlinear relationships; however, they are equally prone to overfitting—especially when trained on small, task-specific datasets. In the context of floating solar-ocean platforms, collecting diverse and high-volume datasets for training can be logistically challenging and expensive<sup>[62-67]</sup>. When overfitting occurs, the model performs well on the training data but fails to generalize to unseen operational conditions, such as sudden sea state changes or unexpected mechanical behavior<sup>[68]</sup>. This lack of adaptability reduces the reliability of the GA-NN controller in dynamic offshore environments. Strategies such as regularization, cross-validation, dropout layers, and data augmentation are necessary to mitigate this issue, but these require careful tuning and additional computational overhead.

## 7.4. Integration with legacy systems

Most existing marine platforms and offshore energy systems were not originally designed with artificial intelligence-based control in mind. Consequently, retrofitting these platforms with GA-NN-based architectures is not straightforward. Integration challenges may include incompatibility of communication protocols, limitations of existing actuators, or restricted access to low-level control loops. These issues necessitate extensive hardware and software modifications, which are both time-consuming and expensive<sup>[69-73]</sup>. Moreover, such upgrades may require operator retraining, system re-certification, and lengthy downtimes. These constraints collectively pose a barrier to the seamless adoption of intelligent control systems on a broad scale.

## 7.5. Energy consumption of controllers

While one of the key objectives of deploying GA-NN controllers is to optimize energy generation and consumption across hybrid solar-ocean platforms, it is paradoxical that the controller itself can become a significant energy consumer. The continuous computational load imposed by evolutionary algorithms and neural network operations—especially in real-time control loops—can lead to increase on board power demand<sup>[74]</sup>. This is particularly problematic in isolated oceanic locations where power resources are limited and energy efficiency is paramount. If not carefully managed, the controller's energy footprint could offset the net energy gains achieved through system optimization. Therefore, energy-efficient algorithm design and hardware implementation are crucial considerations for sustainable deployment.

## 8. Future scope

Future research should explore the hybridization of GA with other evolutionary algorithms such as Particle Swarm Optimization (PSO) and Differential Evolution (DE) to accelerate convergence and improve tuning accuracy. In addition, the integration of Reinforcement Learning (RL) into GA-NN frameworks can enhance long-term learning and adaptability under changing marine conditions. Emphasis should also be placed on sustainable AI, ensuring that the control algorithms themselves are energy-efficient and suitable for remote deployments. Techniques such as neural network pruning, quantization, and lightweight model architectures could reduce computational load and enable deployment even in constrained environments. While Edge AI and Digital Twin technologies are already discussed in operational contexts, their future advancements—such as multi-agent edge intelligence or immersive digital twin ecosystems—will further enhance autonomy and predictive capability in floating hybrid platforms.

## 9. Conclusion

This study proposed a novel GA-NN-based control strategy for floating solar-ocean hybrid platforms, aiming to enhance system stability and optimize energy output under variable marine conditions. The proposed framework integrates the global optimization capability of Genetic Algorithms (GA) with the real-time adaptability of Neural Networks (NN), offering an intelligent control mechanism capable of responding to fluctuating environmental inputs. MATLAB/Simulink was employed as the primary simulation environment, enabling comprehensive testing of the controller's performance under dynamic wave and irradiance conditions.

Key contributions of this work include:

- (1) A hybrid control architecture tailored to marine energy platforms;
  - (2) Systematic modelling and simulation of platform dynamics with real-time environmental disturbances;
- and
- (3) Comparative performance validation through convergence plots, tracking metrics, and robustness evaluations. The results demonstrate that the GA-NN controller outperforms conventional methods in terms of minimizing platform tilt, enhancing energy dispatch efficiency, and ensuring control stability.

Importantly, the paper introduces a flexible simulation and control framework that can be extended to various floating renewable systems. It also emphasizes the operational role of Edge AI and Digital Twins—not merely as future concepts, but as integral components of modern control infrastructure. These findings offer a solid foundation for further development of intelligent, autonomous marine energy systems. Although Edge AI and Digital Twins offer significant advantages for real-time adaptability and predictive maintenance in offshore renewable systems, their practical integration faces challenges. These include limited on board computational resources, intermittent communication links, sensor reliability issues, and cybersecurity vulnerabilities. Addressing these barriers through lightweight models, fault-tolerant sensor networks, and secure co-simulation frameworks will be crucial for transitioning from simulation-based validation to fully autonomous offshore platforms.

## Abbreviations

---

GA	Genetic Algorithm (GA)
NN	Neural Network (NN)
GA-NN	Genetic Algorithm-Tuned Neural Network (GA-NN)
ANN	Artificial Neural Network (ANN)
REN	Renewable Energy (REN)
WECs	Wave Energy Converters (WECs)
OWCs	Oscillating Water Columns (OWCs)
RNN	Recurrent Neural Network (RNN)
LSTM	Long Short-Term Memory (LSTM)
GRU	Gated Recurrent Unit (GRU)
CNN	Convolutional Neural Network (CNN)
MPC	Model Predictive Control (MPC)
PID	Proportional-Integral-Derivative (PID)
RMS	Root Mean Square (RMS)
SMC	Sliding Mode Control (SMC)
$H_\infty$	H-infinity Control ( $H_\infty$ )
HAHE	Hybrid Ambient Hybrid Energy (HAHE)
SoC	State of Charge (SoC)
PSO	Particle Swarm Optimization (PSO)
DE	Differential Evolution (DE)
RL	Reinforcement Learning (RL)
AI	Artificial Intelligence (AI)

---

## Author Contributions

“Conceptualization, D.K.K. and A.MT.; methodology, D.K.K.; software, S.G.; validation, S.G., A.S. and S.K.P.; formal analysis, S.S.C.; investigation, A.P.; resources, A.S.K.; data curation, S.K.P.; writing—original draft preparation, D.K.K.; writing—review and editing, A.S.K.; visualization, A.P.; supervision, A.S.K.” All authors have read and agreed to the published version of the manuscript.

## Acknowledgments

The authors would like to express their sincere gratitude to Dr. D. Y. Patil Institute of Technology and Dr. D. Y. Patil Dnyan Prasad University, Pimpri, Pune, India, for providing the necessary support and research infrastructure. The authors also acknowledge the administrative and technical assistance extended during this study, which contributed significantly to the successful completion of this work.

## Conflict of Interest

The authors declare no conflict of interest.

## References

1. Cai C, Li C. Dynamic positioning of marine vessel based on LQ controller optimized by the MPSO. Proceedings of the 2021 5th International Conference on Electronic Information Technology and Computer Engineering. 2020 Nov 6;970. <https://doi.org/10.1145/3443467.3443889>

2. Ghosh S, Karar V. Assimilation of Optimal Sized Hybrid Photovoltaic-Biomass System by Dragonfly Algorithm with Grid. *Energies*. 2018 Jul 20;11(7):1892. <https://doi.org/10.3390/en11071892>
3. Saharia BJ, Brahma H, Sarmah N. A review of algorithms for control and optimization for energy management of hybrid renewable energy systems. *Journal of Renewable and Sustainable Energy*. 2018 Sep 1;10(5). <https://doi.org/10.1063/1.5032146>
4. Mamodiya U, Kishor I, Garine R, Ganguly P, Naik N. Artificial intelligence based hybrid solar energy systems with smart materials and adaptive photovoltaics for sustainable power generation. *Scientific Reports*. 2025 May 19;15(1). <https://doi.org/10.1038/s41598-025-01788-4>
5. Erdođdu A, Dayı F, YANIK A, YILDIZ F, Ganji F. Innovative Solutions for Combating Climate Change: Advancing Sustainable Energy and Consumption Practices for a Greener Future. *Sustainability*. 2025 Mar 18;17(6):2697. <https://doi.org/10.3390/su17062697>
6. Kalikatzarakis M, Geertsma R, Boonen EJ, Visser K, Negenborn RR. Ship energy management for hybrid propulsion and power supply with shore charging. *Control Engineering Practice*. 2018 May 7;76:133. <https://doi.org/10.1016/j.conengprac.2018.04.009>
7. Kumar P, Arya SR, Mistry KD. Optimized neural network and adaptive neuro-fuzzy controlled dynamic voltage restorer for power quality performance. *International Journal of Emerging Electric Power Systems*. 2021 Apr 14;22(4):383. <https://doi.org/10.1515/ijeeps-2020-0256>
8. Ali SS, Choi BJ. State-of-the-Art Artificial Intelligence Techniques for Distributed Smart Grids: A Review. *Electronics*. 2020 Jun 22;9(6):1030. <https://doi.org/10.3390/electronics9061030>
9. Guo X, Zhang X, Tian X, Li X, Lu W. Predicting heave and surge motions of a semi-submersible with neural networks. *Applied Ocean Research*. 2021 May 24;112:102708. <https://doi.org/10.1016/j.apor.2021.102708>
10. Abdullah-Al-Mahbub Md, Islam ARMdT, Alam E, Asha M. Sustainable solar energy potential on marine passenger ships of Bay of Bengal: A way of reducing carbon dioxide emissions and disaster risk reduction. *Energy Exploration & Exploitation*. 2023 May 18;41(5):1697. <https://doi.org/10.1177/01445987231173097>
11. Kyari IB, Muhammad JY. Hybrid Renewable Energy Systems for Electrification: A Review. *Science Journal of Circuits Systems and Signal Processing*. 2019 Jan 1;8(2):32. <https://doi.org/10.11648/j.cssp.20190802.11>
12. Trinh VL, Chung CK. Renewable energy for SDG-7 and sustainable electrical production, integration, industrial application, and globalization: Review. *Cleaner Engineering and Technology*. 2023 Jul 13;15:100657. <https://doi.org/10.1016/j.clet.2023.100657>
13. Nguyen HP, Wang CM, Tay ZY, Luong VH. Wave energy converter and large floating platform integration: A review. *Ocean Engineering*. 2020 Aug 11;213:107768. <https://doi.org/10.1016/j.oceaneng.2020.107768>
14. Zhang C, Hu P, Zhang R, Wu Q, Yang A. Modeling of Coupling Effects in Neural Networks for Ship Motion Prediction. 2021 Jul 15; <https://doi.org/10.36227/techrxiv.14945544>
15. D'Agostino D, Serani A, Stern F, Diez M. Recurrent-type Neural Networks for Real-time Short-term Prediction of Ship Motions in High Sea State. *arXiv*. 2021 Jan 1. <https://arxiv.org/abs/2105.13102>
16. Li G, Kawan B, Wang H, Zhang H. Neural-network-based modelling and analysis for time series prediction of ship motion. *Ship Technology Research*. 2017 Jan 2;64(1):30. <https://doi.org/10.1080/09377255.2017.1309786>
17. Zhang C, Hu P, Zhang R, Wu Q, Yang A. Modeling of Coupling Effects in Neural Networks for Ship Motion Prediction. 2021 Jul 15. <https://doi.org/10.36227/techrxiv.14945544>
18. Kumar NK, Ramasamy S, Mamun AA. Ocean wave characteristics prediction and its load estimation on marine structures: A transfer learning approach. *Marine Structures*. 2018 Jun 14;61:202. <https://doi.org/10.1016/j.marstruc.2018.05.007>
19. Silva KM, Maki KJ. Data-Driven system identification of 6-DoF ship motion in waves with neural networks. *Applied Ocean Research*. 2022 Jun 10;125:103222. <https://doi.org/10.1016/j.apor.2022.103222>
20. D'Agostino D, Serani A, Stern F, Diez M. Recurrent-type Neural Networks for Real-time Short-term Prediction of Ship Motions in High Sea State. 2022 Jan 31;1(1). <https://doi.org/10.2218/marine2021.6851>
21. Zhang D, Zhou X, Wang Z, Peng Y, Xie S. A data driven method for multi-step prediction of ship roll motion in high sea states. *Ocean Engineering*. 2023 Mar 27;276:114230. <https://doi.org/10.1016/j.oceaneng.2023.114230>
22. Rong H, Teixeira AP, Soares CG. Ship trajectory uncertainty prediction based on a Gaussian Process model. *Ocean Engineering*. 2019 May 8;182:499. <https://doi.org/10.1016/j.oceaneng.2019.04.024>
23. Huang B, Zou Z. Short-Term Prediction of Ship Pitching Motion Based on Artificial Neural Networks. 2016 Jun 19. <https://doi.org/10.1115/omae2016-54317>
24. Li T, Xuan A, Shen L. Study of Nonlinear Interaction between Waves and Ocean Currents Using High-Fidelity Simulation and Machine Learning. *arXiv*. 2021 Jan 1. <https://arxiv.org/abs/2101.03439>
25. Antonov DV. Comparative analysis of algorithms for ship pitching forecasting. *IOP Conference Series Materials Science and Engineering*. 2020 Nov 1;984(1):12007. <https://doi.org/10.1088/1757-899x/984/1/012007>
26. Lei T, Lu Y, Zhang C, Wang J, Zhou Q. Research on the Application of GIS Technology Combined with RBFNN-GA Algorithm in the Delineation of Geological Hazard Prone Areas. *Computational Intelligence and Neuroscience*. 2021 Jan 1;2021:1. <https://doi.org/10.1155/2021/2677453>
27. Liu J, Shi G, Zhu K. Vessel Trajectory Prediction Model Based on AIS Sensor Data and Adaptive Chaos Differential Evolution Support Vector Regression (ACDE-SVR). *Applied Sciences*. 2019 Jul 25;9(15):2983. <https://doi.org/10.3390/app9152983>

28. Kusakana K, Vermaak H. Hybrid diesel generator/renewable energy system performance modeling. *Renewable Energy*. 2013 Dec 9;67:97. <https://doi.org/10.1016/j.renene.2013.11.025>
29. Chalal L, Dieulot J, Dauphin-Tanguy G, Colas F. Supervisory predictive control of a hybrid solar panels, microturbine and battery power generation plant. *IFAC Proceedings Volumes*. 2012 Jan 1;45(21):375. <https://doi.org/10.3182/20120902-4-fr-2032.00067>
30. Zhang C, Wang C, Wei Y, Wang J. Observer-based adaptive tracking control of underactuated autonomous marine vehicle with uncertainty dynamic. *Applied Ocean Research*. 2020 Oct 7;104:102364. <https://doi.org/10.1016/j.apor.2020.102364>
31. Liu J, Allen R, Hong Y. Ship motion stabilizing control using a combination of model predictive control and an adaptive input disturbance predictor. *Proceedings of the Institution of Mechanical Engineers Part I Journal of Systems and Control Engineering*. 2011 Jun 17;225(5):591. <https://doi.org/10.1177/20413041110394569>
32. Xiao N, Zhou R, Lin X. Type selection and design of hybrid propulsion system of ship. *IOP Conference Series Materials Science and Engineering*. 2016 Nov 1;157:12034. <https://doi.org/10.1088/1757-899x/157/1/012034>
33. Hatledal LI, Skulstad R, Li G, Styve A, Zhang H. Co-simulation as a Fundamental Technology for Twin Ships. *Modeling Identification and Control A Norwegian Research Bulletin*. 2020 Jan 1;41(4):297. <https://doi.org/10.4173/mic.2020.4.2>
34. Geertsma R, Negenborn RR, Visser K, Hopman JJ. Design and control of hybrid power and propulsion systems for smart ships: A review of developments. *Applied Energy*. 2017 Mar 8;194:30. <https://doi.org/10.1016/j.apenergy.2017.02.060>
35. Aryani DR, Kim J, Song H. Suppression of PV Output Fluctuation Using a Battery Energy Storage System with Model Predictive Control. *International Journal of Fuzzy Logic and Intelligent Systems*. 2017 Sep 30;17(3):202. <https://doi.org/10.5391/ijfis.2017.17.3.202>
36. Fossen TI. *Handbook of Marine Craft Hydrodynamics and Motion Control*. 2011. <https://doi.org/10.1002/9781119994138>
37. Brodtkorb AH, Værnø SA, Teel AR, Sørensen AJ, Skjetne R. Hybrid controller concept for dynamic positioning of marine vessels with experimental results. *Automatica*. 2018 Apr 12;93:489. <https://doi.org/10.1016/j.automatica.2018.03.047>
38. Brodtkorb AH, Sørensen AJ, Teel AR. Increasing the Operation Window for Dynamic Positioned Vessels Using the Concept of Hybrid Control. 2014 Jun 8. <https://doi.org/10.1115/omae2014-23601>
39. Saad A, Faddel S, Youssef T, Mohammed OA. Small-signal model predictive control based resilient energy storage management strategy for all electric ship MVDC voltage stabilization. *Journal of Energy Storage*. 2018 Dec 15;21:370. <https://doi.org/10.1016/j.est.2018.12.009>
40. Bärnlund A, Linder J, Feyzmahdavian HR, Lundh M, Tervo K. Nonlinear MPC for Combined Motion Control and Thrust Allocation of Ships. *IFAC-PapersOnLine*. 2020 Jan 1;53(2):14698. <https://doi.org/10.1016/j.ifacol.2020.12.1834>
41. Gotshall SP, Soule T. Stochastic training of a biologically plausible spino-neuromuscular system model. 2007 Jul 7;253. <https://doi.org/10.1145/1276958.1277011>
42. Zhuo Y, Hearn GE. Specialized learning for ship intelligent track-keeping using neurofuzzy. *IFAC Proceedings Volumes*. 2004 Jul 1;37(10):291. [https://doi.org/10.1016/s1474-6670\(17\)31747-0](https://doi.org/10.1016/s1474-6670(17)31747-0)
43. Hu X, Du J, Zhu G, Sun Y. Robust adaptive NN control of dynamically positioned vessels under input constraints. *Neurocomputing*. 2018 Sep 1;318:201. <https://doi.org/10.1016/j.neucom.2018.08.056>
44. Wang Y, Guo L, Guo C. A Dynamic Fuzzy Neural Networks-Based Surface Vessels Course Tracking Controller. *Applied Mechanics and Materials*. 2014 Sep 1 ;122. <https://doi.org/10.4028/www.scientific.net/amm.644-650.122>
45. Olawade DB, Wada OZ, David-Olawade AC, Fapohunda O, Ige AO, Ling J. Artificial intelligence potential for net zero sustainability: Current evidence and prospects. *Next Sustainability*. 2024 Jan 1 ;4:100041. <https://doi.org/10.1016/j.nxsust.2024.100041>
46. Smarra F, Jain A, Rubeis T de, Ambrosini D, D’Innocenzo A, Mangharam R. Data-driven model predictive control using random forests for building energy optimization and climate control. *Applied Energy*. 2018 Apr 21;226:1252. <https://doi.org/10.1016/j.apenergy.2018.02.126>
47. Eyoh J, Kalawsky R. Reduction of impacts of oil and gas operations through intelligent maintenance solution. 2018 Jun 30 ;13306:67. <https://doi.org/10.1145/3233740.3233747>
48. Loboda I. *Neural Networks for Gas Turbine Diagnosis*. In: *InTech eBooks*. 2016. <https://doi.org/10.5772/63107>
49. Øvereng SS, Nguyen DT, Hamre G. Dynamic Positioning using Deep Reinforcement Learning. *Ocean Engineering*. 2021 Jul 6;235:109433. <https://doi.org/10.1016/j.oceaneng.2021.109433>
50. Anderlini E, Forehand D, Bannon E, Abusara M. Reactive control of a wave energy converter using artificial neural networks. *International Journal of Marine Energy*. 2017 Aug 14;19:207. <https://doi.org/10.1016/j.ijome.2017.08.001>
51. Frank D, Latif DA, Muehlebach M, Unger B, Staab S. Robust Recurrent Neural Network to Identify Ship Motion in Open Water with Performance Guarantees -- Technical Report. arXiv (Cornell University). 2022 Jan 1. <https://arxiv.org/abs/2212.05781>
52. Seo I, Kim S, Ryu YW, Park J, Han DS. Underwater Moving Target Classification Using Multilayer Processing of Active Sonar System. *Applied Sciences*. 2019 Oct 30;9(21):4617. <https://doi.org/10.3390/app9214617>

53. Ashfaq S, Hoffman AF, Mitra S, Sah S, AskariHemmat M, Saboori E. DeepliteRT: Computer Vision at the Edge. arXiv (Cornell University). 2023 Jan 1. <https://arxiv.org/abs/2309.10878>
54. Qu S, Men X, Liu M, Cui J, Wu H, Fu Y. Navigation Attitude Prediction for Unmanned Surface Vessels in Wave Environments Using Improved Unscented Kalman Filter and Digital Twin Model. *Journal of Marine Science and Engineering*. 2025 May 9;13(5):932. <https://doi.org/10.3390/jmse13050932>
55. Korteling JE, Boer-Visschedijk GC van de, Blankendaal R, Boonekamp R, Eikelboom AR. Human- versus Artificial Intelligence. *Frontiers in Artificial Intelligence*. *Frontiers Media*; 2021 Mar 25; 4. <https://doi.org/10.3389/frai.2021.622364>
56. Zainurin SN, Ismail WZW, Mahamud SNI, Ismail I, Jamaludin J, Ariffin KNZ, Kamil WMWA. Advancements in Monitoring Water Quality Based on Various Sensing Methods: A Systematic Review. *International Journal of Environmental Research and Public Health*. Multidisciplinary Digital Publishing Institute; 2022 Oct 28; 19(21):14080. <https://doi.org/10.3390/ijerph192114080>
57. Siang LC, Elnawawi S, Rippon LD, O'Connor DL, Gopaluni RB. Data Quality Over Quantity: Pitfalls and Guidelines for Process Analytics. arXiv (Cornell University). 2022 Jan 1. <https://arxiv.org/abs/2211.06440>
58. Cao Q, Goswami S, Karniadakis GE, Chakraborty S. Deep Neural Operators Can Predict the Real-Time Response of Floating Offshore Structures Under Irregular Waves. arXiv (Cornell University). 2023 Jan 1. <https://arxiv.org/abs/2302.06667>
59. Liu W, Pyrcz MJ. Physics-Informed Graph Neural Network for Spatial-Temporal Production Forecasting. arXiv (Cornell University). 2022 Jan 1. <https://arxiv.org/abs/2209.11885>
60. Chen X, Chen Y, Chase JG. *Mobiles Robots - Past Present and Future*. In: InTech eBooks. 2009. <https://doi.org/10.5772/6986>
61. Gronfula MG, Sayed K. AI-Driven Predictive Control for Dynamic Energy Optimization in Flying Cars. *Energies*. 2025 Apr 2; 18(7):1781. <https://doi.org/10.3390/en18071781>
62. Ramani, P., Reji, V., Sathish Kumar, V., et al., 2025. Deep learning-based detection and classification of moss and crack damage in rock structures for geo-mechanical preservation. *Journal of Mines, Metals & Fuels*. 73(3), 345–352.
63. Chippalkatti, S., Chekuri, R.B., Ohol, S.S., et al., 2025. Enhancing heat transfer in micro-channel heat sinks through geometrical optimization. *Journal of Mines, Metals & Fuels*. 73(3), 353–361.
64. Kurhade, A.S., Siraskar, G.D., Chekuri, R.B., et al., 2025. Biodiesel blends: A sustainable solution for diesel engine performance improvement. *Journal of Mines, Metals & Fuels*. 73(3), 362–370.
65. Kurhade, A.S., Bhavani, P., Patil, S.A., et al., 2025. Mitigating environmental impact: A study on the performance and emissions of a diesel engine fueled with biodiesel blend. *Journal of Mines, Metals & Fuels*. 73(4), 981–989.
66. Wakchaure, G.N., Vijayarao, P., Jadhav, T.A., et al., 2025. Performance evaluation of trapezoidal ducts with delta wing vortex generators: An experimental investigation. *Journal of Mines, Metals & Fuels*. 73(4), 991–1003.
67. Wakchaure, G.N., Jagtap, S.V., Gandhi, P., et al., 2025. Heat transfer characteristics of trapezoidal duct using delta wing vortex generators. *Journal of Mines, Metals & Fuels*. 73(4), 1053–1056.
68. Chougule, S.M., Murali, G., Kurhade, A.S., 2025. Failure investigation of the driving shaft in an industrial paddle mixer. *Journal of Mines, Metals & Fuels*. 73(5), 1247–1256.
69. Kurhade, A.S., Sugumaran, S., Kolhalkar, N.R., et al., 2025. Thermal management of mobile devices via PCM. *Journal of Mines, Metals & Fuels*. 73(5), 1313–1320.
70. Chougule, S.M., Murali, G., Kurhade, A.S., 2025. Finite element analysis and design optimization of a paddle mixer shaft. *Journal of Mines, Metals & Fuels*. 73(5), 1343–1354.
71. Waware, S.Y., Ahire, P.P., Napate, K., et al., 2025. Advancements in heat transfer enhancement using perforated twisted tapes: A comprehensive review. *Journal of Mines, Metals & Fuels*. 73(5), 1355–1363.
72. Patil, Y., Tatiya, M., Dharmadhikari, D.D., et al., 2025. The role of AI in reducing environmental impact in the mining sector. *Journal of Mines, Metals & Fuels*, 73(5), 1365–1378.
73. Napte, K., E. Kondhalkar, G., Vishal Patil, S., Vishnu Kharat, P., Snehal Mayur Banarase, Sidhappa Kurhade, A., & Shital Yashwant Waware. (2025). Recent Advances in Sustainable Concrete and Steel Alternatives for Marine Infrastructure. *Sustainable Marine Structures*, 7(2), 107–131. <https://doi.org/10.36956/sms.v7i2.2072>
74. Sarode, G. C., Gholap, P., Pathak, K. R., Vali, P. S. N. M., Saharkar, U., Murali, G., & Kurhade, A. S. (2025). Edge AI and Explainable Models for Real-Time Decision-Making in Ocean Renewable Energy Systems. *Sustainable Marine Structures*, 7(3), 17–42. <https://doi.org/10.36956/sms.v7i3.2239>